

ADJUSTABLE SPRING POWER - SURFACE APPLIED CLOSER



5000-TP SERIES

GRADE 1 • HANDICAP



FEATURES

- Model 5001-TP
- ADA (Handicap) multi-sized closer with adjustable spring power for a range of sizes. 1-6 adjustable back check and delay action, adjustable after installation.
- Two Speed Control Valves: Closing and latching speeds controlled by separate regulating valves, adjustable after installation.
- Universal application. Non-handed for standard, top jamb or parallel arm installation.
- Furnished with dress cover and PA bracket.
- Rack and pinion mechanism contained in a high tensile precision cast aluminum housing.
- Stable hydraulic door check fluid for any climatic operation and constant lubrication.
- Optional, hold-open arms.
- Hold-open arms are adjustable for holding from 90° to 180°

FINISHES

- AL Aluminum
- DU Storefront Bronze

10 YEAR WARRANTY



Spring Power Adjustment




 Latching and Sweep Adjustment Valves



 Back-Check and Delay Adjustment Valve

TECHNICAL DIMENSIONS


Description	WITH DRESS COVER	NO DRESS COVER
A. Length of Closer Body	13"	12 11/16"
B. Horizontal Mounting Holes	12"	12"
C. Vertical Mounting Holes	3/ ₄ "	3/4"
D. Overall Height	5 ¹ / ₈ "	5 ¹ / ₁₆ "
E. Top of Door to Bottom of Closer	3 ¹ / ₂ "	3 ⁷ / ₁₆ "
F. Closer Body Height	3"	2 7/8"
G. Projection from Door	2 ⁵ / ₁₆ "	2 3/16"




International Door Closers, Inc.

West: 800-544-4422 • East: 800-225-6737 www.intldoorclosers.com

INSTALLATION TYPES



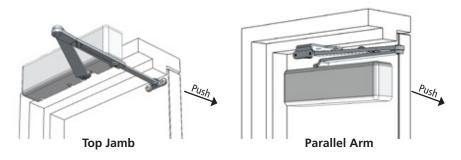

TYPICAL INSTALLATIONS (REGULAR ARMS SHOWN) Hold-Open Arms are similar

SELECTION CHART

STYLE	MODEL NO.	ТҮРЕ
WITH DRESS COVER	5001-TP	Regular Arm Parallel Arm Hold-Open Arm Parallel Hold-Open Arm

PARTS AND ACCESSORIES - 5001-TP

Parts	Description	Part #	
CC CC	Complete Arm Assembly	501	NOTE: Doors of unusual height or weight, or doors subject to severe wind or draft conditions,
	Hold-Open Forearm	522	or abusive usage, require one or two more full turns of hex spring adjustment nut than shown on the Installation
60	Parallel Bracket for Regular Arm	525	instructions. SPECIFY: Closer Model or Part Number
	Dress Cover	DC-5000	SPECIFY FINISH: Al-Aluminum DU -Storefront Bronze
	Thru Bolt & Grommet Nut (Set of 4 each)	TBGN-50	
M	Sex Nuts & Bolts	18-SN	